


## KS-7315/7317 JUMPER SETTING

- **JP1 : PANEL POWER TYPE**
  - Pin 1-2 Short : 3.3V, 15"LCD PANEL
  - Pin 2-3 Short : 5V, 17"LCD PANEL
- **JP2 : VGA +12V output**
  - Open : NO 12V
  - Short : 12V output
- **JP3 : COM1/COM2 Pin9 connected setting**
  - Pin 1-3 Short : COM1 Pin9 connected to 5 V
  - Pin 3-5 Short : COM1 Pin9 connected as RI
  - Pin 2-4 Short : COM2 Pin9 connected to 5V
  - Pin 4-6 Short : COM2 Pin9 connected as RI
- **JP4 : NC,reserved for COM port 12V output**
- **JP5 : COM3/COM4 Pin9 connected setting**
  - Pin 1-3 Short : COM3 Pin9 connected to 5 V
  - Pin 3-5 Short : COM3 Pin9 connected as RI
  - Pin 2-4 Short : COM4 Pin9 connected to 5V
  - Pin 4-6 Short : COM4 Pin9 connected as RI
- **JP6 : NC,reserved for COM port 12V output**
- **JP7 : UPS STATUS SELECT**
  - Pin 1-2 Short : COM1 Pin1 connected as DCD
  - Open : Disable Pin 2-3 Short : UPS Detect
- **JP8 : USB TOUCH & OS FUNCTION SELECT**
  - Pin 1-2 Open : Linux or WinCE
  - Pin 1-2 Short : MS-DOS , Windows OS. (win98 , win 2000 ,win XP)
  - Pin 3-4 Open : Fujitsu Touch panel
  - Pin 3-4 Short : ELO or OEM Touch panel
  - Pin 5-6 Open : Linux ,WinCE ,Windows OS. (win98 , win 2000 ,win XP)
  - Pin 5-6 Short : MS-DOS
- **JP10 : LAN FUNCTION SELECT**
  - Short : Enable
  - Open : Disable
- **JP12 : CMOS DATA CONTROL**
  - Pin 1-2 Short : Normal
  - Pin 2-3 Short : clear CMOS
- **JP13 : 2.5" HDD Master/Saver Setting**
  - Open : Reserved

# KS-7315/7317 COMPONENT SIDE

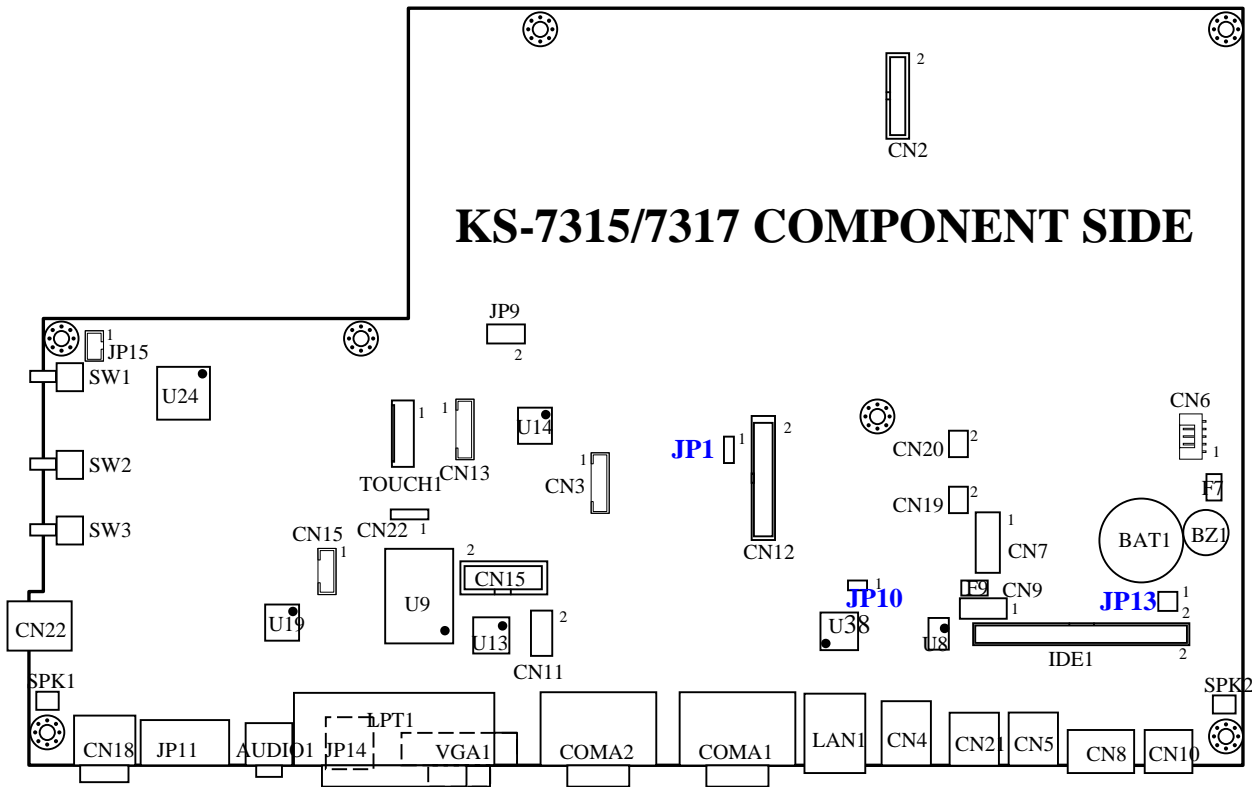

# KS-7315/7317 SOLDER SIDE

